

Quick installation guide

1. Supplied accessories



Junction BOX




PG 21 Seal



PG 36 Seal



Nuts

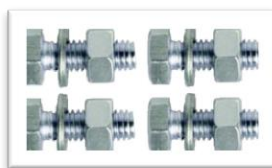

Screw + Nut




Key

2. BOX Dimensions and horizontal projection

(All dimensions in mm.

Drawings not true to scale)

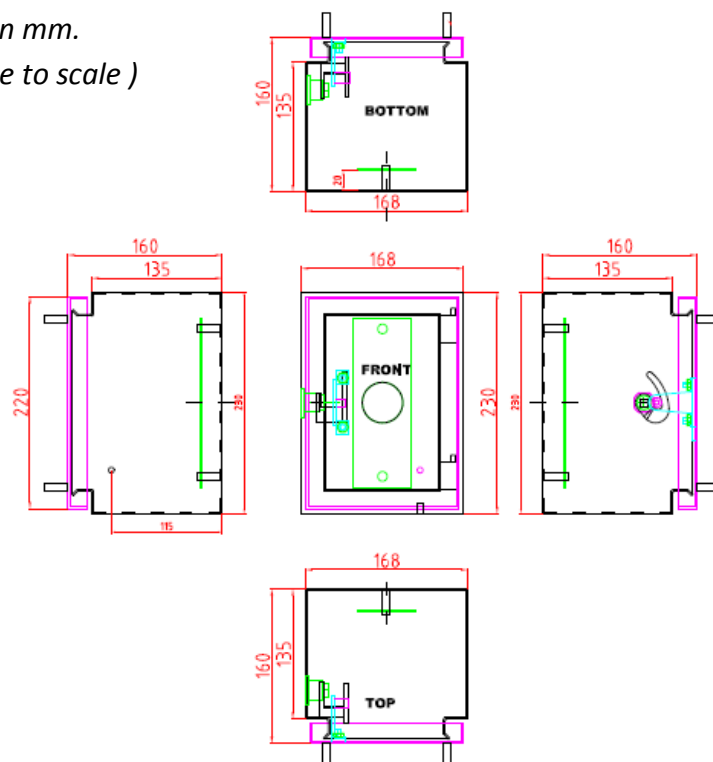

3. Cameras and brackets weight

TK-C686WPU/TK-C585WPU	5.5 Kg	BK-WB68CM	2.8 Kg
VN-H657WPU	5.6 Kg	BK-WB68UPA	1.9 Kg

4. Instruction Manual

Please read it carefully before you start mounting procedure of the box.

1. Firstly use all 4 screws and nuts to mount junction box to the wall, pole or corner bracket.
2. Use screw and nut to mount camera fall prevention wire.
3. Power supply switch (if decided) to be mounted on din 35 rail.
4. Use block connector to connect all camera wires. You can plug out it from the din rail, connect wires and plug in again.



5. Insert PG 36 seal to the back side of the box. Before placing it cut appropriate size of the seal so that wires adhere tightly (insulating tape is recommended to be used for better fit).

6. Lead camera wires through element 6 and 7. Adjust the appropriate length of the wires.
7. Screw together element no. 6 and 7 with wires inside and pull it through the whole 9.
8. Screw the nut no. 8 on thread no. 7.



10. Mount the camera arm bracket here. Than secure it with 4 nuts.